




# MODEL EZ2

## BACKLASH FREE LINE SHAFTS

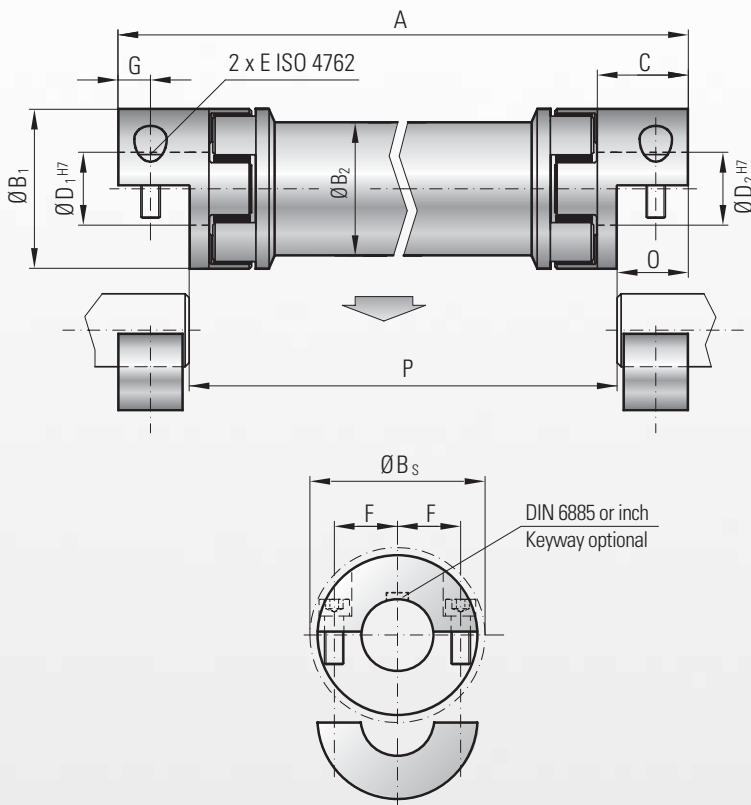


### Ordering example

EZ2 / 020 / 1200 / A / 24 / 19.05 / XX

Model  
Series  
Overall length  
Type Elastomer insert  
Bore Ø D1 H7  
Bore Ø D2 H7  
Non standard e.g. finely balanced

All data is subject to change without notice.

### Assembly instructions

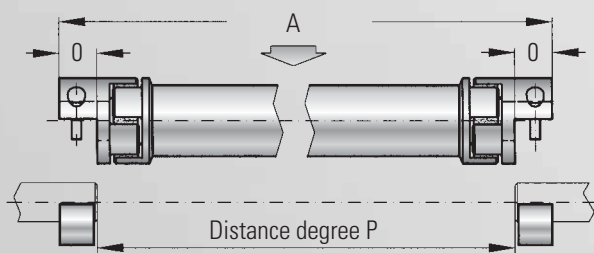

The total length of the axis is defined by the distance P + 2xØ.



with split clamping hubs

### Properties:

- radial mounting possible with split hubs
- Spans distances of up to 4 m
- No intermediate support bearing required
- Low moment of inertia
- damps vibrations
- press-fit design
- backlash-free

### Material:

Clamping hub: up to series 450 high strength aluminum, from series 800 and up steel  
Elastomer insert: precision molded, wear resistant, and thermally stable polymer  
Intermediate tube: precision machined aluminum tube; **steel and composite tubes are also available**

### Design:

Two coupling hubs are concentrically machined with concave driving jaws  
Elastomer inserts are available in type A or B  
The two coupling elements are connected with a precise and concentrically machined aluminum tube

### Speed:

Please advise the application speed when ordering or inquiring about EZ Line shafts

### Tolerance:

On the hub/shaft connection 0.01 to 0.05 mm

### Torsional stiffness:

To optimize the application different elastomer inserts with different shore hardnesses are available

### R+W calculation program

With specially developed software R+W can calculate the critical resonant speeds for each application.

Results of a calculation are shown below.

The critical speed can be altered by changing the tube material and/or other parameters.

Critical resonant speed	$n_k$	=	rpm
Torsional stiffness tube	$C_T^{ZWR}$	=	Nm/rad
Total stiffness EZ 2	$C_{Tdyn}^{EZ}$	=	Nm/rad
Torsional deflection	$\varphi$	=	Degree-Min-Sec
Weight of total axes	$m$	=	kg
Critical resonance speed	$n_e$	=	rpm
Mass moment of inertia	$J$	=	kgm <sup>2</sup>
Permissible lateral misalignment	$\Delta Kr$	=	mm

# MODEL EZ2

## BACKLASH FREE LINE SHAFTS


Model EZ 2	Series														
	10		20		60		150		300		450		800		
Type (Elastomer insert)		A	B	A	B	A	B	A	B	A	B	A	B	A	B
Rated torque (Nm)	$T_{KN}$	12.5	16	17	21	60	75	160	200	325	405	530	660	950	1100
Max. torque* (Nm)	$T_{Kmax}$	25	32	34	42	120	150	320	400	650	810	1060	1350	1900	2150
Overall length (mm)	A	95 - 4000		130 - 4000		175 - 4000		200 - 4000		245 - 4000		280 - 4000		320 - 4000	
Outer diameter hub (mm)	$B_1$	32		42		56		66.5		82		102		136.5	
Outer diameter tube (mm)	$B_2$	28		35		50		60		76		90		120	
Outer diameter with screwhead (mm)	$B_3$	32		44.5		57		68		85		105		139	
Fit length (mm)	C	20		25		40		47		55		65		79	
Inner diameter range H7 (mm)	$D_{1/2}$	5 - 16		8 - 25		14 - 32		19 - 36		19 - 45		24 - 60		35 - 80	
Mounting screw (ISO 4762/12.9)		M4		M5		M6		M8		M10		M12		M16	
Tightening torque of the mounting screw (Nm)	E	4		8		15		35		70		120		290	
Distance between centers (mm)	F	10.5		15.5		21		24		29		38		50.5	
Distance (mm)	G	7.5		8.5		15		17.5		20		25		30	
Mounting length (mm)	O	16.6		18.6		32		37		42		52		62	
Moment of inertia per Hub half ( $10^{-3} \text{ kgm}^2$ )	$J_1/J_2$	0.01		0.02		0.15		0.21		1.02		2.3		17	
Inertia of tube per meter ( $10^{-3} \text{ kgm}^2$ )	$J_3$	0.075		0.183		0.66		1.18		2.48		10.6		38	
Dynamic torsional stiffness of the couplings (Nm/rad)	$C_{Tdyn}^E$	270	825	1270	2220	3970	5950	6700	14650	11850	20200	27700	40600	41300	90000
Torsional stiffness of tube per meter (Nm/rad)	$C_T^{ZWR}$	321		1530		6632		11810		20230		65340		392800	
Distance between centers (mm)	N	26		33		49		57		67		78		94	
Length of the couplings (mm)	H	34		46		63		73		86		99		125	

\* Max. transferable torque of the clamping hub see EKH (page 8)

1 Nm = 8.85 in lbs

### The selection process for Servo-Insert-Couplings EZ 2 / EZV

A	Overall length	m	$C_{Tdyn}^E$	Dynamic torsional stiffness of both elastomer inserts	Nm/rad	H	Length of the coupling	mm
AB	Length AB = (A - 2xN)	m	$C_T^{ZWR}$	Torsional stiffness of tube per meter	Nm/rad	N	Distance between center lines	mm
Z	Tube length Z = (A - 2xH)	m	$C_{Tdyn}^{EZ}$	Torsional stiffness of entire coupling	Nm/rad	$TK_{max}$	Max. torque	Nm
						$\varphi$	Angle of twist	degree

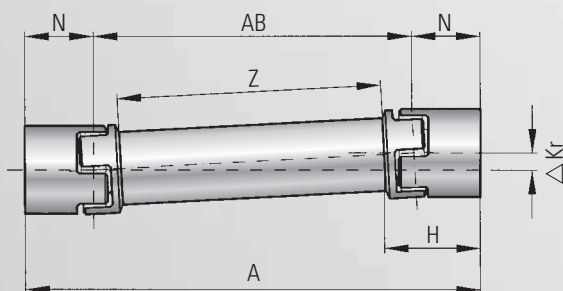

#### ■ According to torsional stiffness

$$C_{Tdyn}^{EZ} = \frac{C_{Tdyn}^E \times (C_T^{ZWR}/Z)}{C_{Tdyn}^E + (C_T^{ZWR}/Z)} \text{ (Nm/rad)}$$

#### ■ According to angle of twist

$$\varphi = \frac{180 \times TK_{max}}{\pi \times C_{Tdyn}^{EZ}} \text{ (degree)}$$

#### ■ Max. possible misalignments



$$\Delta Kr_{max} = \tan \Delta \frac{Kw}{2} \cdot AB$$

$$AB = A - 2xN$$



$$\Delta Kw_{max} = \text{ca. } 2^\circ$$



$$\Delta Ka_{max} = \text{ca. } \pm 2$$